

# PORTABLE AREA WORKLIGHT INCANDESCENT



**300-WL-INC** *Rustproof Vandal-Resistant Luminaire  
75 Watts Maximum*

Specifically designed to provide illumination in on-site production areas where endurance to environmental elements are as important as dependable, reliable service. Engineered with materials offering high resistance to rust, corrosion, and impact. **Polycarbonate Safety Yellow Housing** is nonconductive, insuring more safety to the end user. Two maximum-secure magnets (pull strength rated 90 lbs each) and one eye bolt, both integral to the Worklight, allow convenient mounting either to a steel structure or overhead by a safety chain (not included). **Polycarbonate lens** with smooth exterior allows ease of cleaning and clear prismatic interior assures optimal lumen output. Ideally suited in the construction and assembly work in commercial, industrial, and government manufacturing operations.



## Specifications

<b>Lens:</b>	Injection molded of UV-stabilized polycarbonate for lens impact strength and user safety. Average thickness is $\frac{1}{8}$ ". Clear prismatic interior for optimal lumen output, smooth exterior surface for ease of cleaning.
<b>Base Plate:</b>	Rustproof .080" 5052 H-32 tempered marine-grade aluminum.
<b>Gasket:</b>	Lens gasket is closed-cell neoprene rubber for maximum dirt, dust and moisture barrier.
<b>Housing:</b>	Injection molded of UV-stabilized reinforced Safety Yellow polycarbonate for impact strength.
<b>Cord, Plug, and Fittings:</b>	Six-foot black 18 AWG SJTOW cord, with 3-prong NEMA 5-15 plug. Liquid Tight Fitting exceeds NEMA 6 specifications
<b>Socket:</b>	Medium-base ceramic with nickel-plated copper screw shell, rated 250 V, 660W, with leads insulated for 105°C.
<b>Lamp</b>	Uses Type A-19 incandescent lamp. Provided by others.

**Hardware:** Four stainless-steel 8-32 phillips truss head screws attach lens to base plate. On/Off Toggle Switch is hard plastic with rubber boot. Two maximum-secure Magnets pull strength rated for holding 90 lbs each. One Eyebolt for mounting by safety chain (not included).

## ETL-US Listed

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94HB or better on lenses and the superior 94-5V rating on housings.

Luminaire Type \_\_\_\_\_  
Catalog Number \_\_\_\_\_  
Job Name \_\_\_\_\_  
Approval \_\_\_\_\_

## WF Harris Lighting

**Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA  
(704) 283-7477 (OPERATOR ASSIST) • (704) 283-6880 (FAX)  
(800) 842-9345 (TOLL FREE)

e-mail: customerservice@wfharris.com  
www.wfharrislighting.com

Printed in USA

Form 1502

12/15

*"A Live Operator Company Standing Ready to Serve Your Lighting Needs"*


# PORTABLE AREA WORKLIGHT INCANDESCENT

Ordering Information (Fill In Block For Complete Catalog Number)

Model

300-WL-INC

## Dimensions

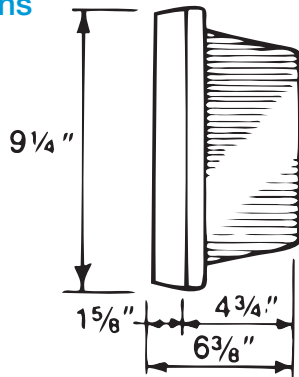

Specifications Subject to Change Without Notice

LENS, HOUSING, AND ALUMINUM BASE  
PLATE CARRY A LIFETIME GUARANTEE.



## WF Harris Lighting

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA

(704) 283-7477 (OPERATOR ASSIST) • (704) 283-6880 (FAX)

(800) 842-9345 (TOLL FREE)

e-mail: [customerservice@wfharris.com](mailto:customerservice@wfharris.com)

[www.wfharrislighting.com](http://www.wfharrislighting.com)