

# INCANDESCENT



## Floodlight Series 150 Watts Maximum

Accepts Par 38 LED Lamps

Designed specifically to withstand the corrosive atmosphere of coastal areas, these directional floodlights can weather the most severe environments. These **rust-resistant**, versatile luminaires are constructed of virtually unbreakable, non-conductive **polycarbonate** and are provided with stainless steel hardware. Perfectly suited for landscape, flood and spot lighting. Surface Mount Wiring Box accessory eliminates the need for a recessed junction box in wall and ceiling installations.



**201-W (White)**  
Shown with optional Hoods - sold separately

### Specifications

**Housing/ Cover:** Injection molded of UV-stabilized **polycarbonate**. Lampholders on Model 201 rotate independently. Threaded pivot of Model 150 is .50" NPT.

**Socket:** High-temperature phenolic with medium base nickel-plated copper screw shell. Rated 250V, 660W, with wire leads insulated to 105°C.

**Gasket:** Silicone rubber washer (.125" thick) is permanently secured within lampholder to seal socket and wire-way from moisture with insertion of lamp. Fiber washers provide watertight seal between pivot joints.

**Hardware:** Stainless steel Phillips truss head screw and wing nut allow angular adjustment to all lampholders. Crossbar and stainless steel mounting screw included with Models 101 and 201. NPT nylon locknut (.50") included with Model 150.

**Lamp:** Not Included - 150 watts maximum. Recommend 90 watt Halogen, 130 volt for greater efficiency and longer lamp life.

**Hood: (optional)** One piece, injection molded UV-stabilized **polycarbonate**. Snap-fit mounting requires no tools or hardware. Hoods aid with light control. Adds an aesthetic value to any application.

**Surface Mount Wiring Box: (optional)** For Models 101 and 201 only. One piece injection molded of UV-stabilized **polycarbonate**. Measures .625" deep. Includes .125" thick closed-cell neoprene rubber gasket to seal against moisture and contaminants. Easily attaches with screws or nails.



**101-BZ (Bronze)**



**150-W (White)**



**201-W-MD (201-W with Motion Sensor)**  
Shown with optional Hoods and Wiring Box - sold separately



**201-W-PC120**  
(201-W with Photo Control)



**101-BK** (Shown with optional Hood - sold separately)

### ETL-US Listed For Wet Locations.

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94-5V.

Luminaire Type \_\_\_\_\_  
 Catalog Number \_\_\_\_\_  
 Job Name \_\_\_\_\_  
 Approval \_\_\_\_\_


**WF Harris Lighting, Inc.™**  
 In Business Since 1970!

*"A Live Operator Company Standing Ready to Serve Your Lighting Needs"*

# INCANDESCENT

## Ordering Information

(Fill In Blanks Below For Complete Product Description)

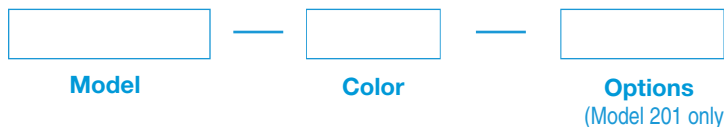

|                                |                  |                                |
|--------------------------------|------------------|--------------------------------|
| <b>101</b> Single Floodlight   | <b>BK-Black</b>  | <b>PC-Photo Control-Black</b>  |
| <b>150</b> Threaded Floodlight | <b>W-White</b>   | <b>MD-Motion Sensor*-White</b> |
| <b>201</b> Double Floodlight   | <b>BZ-Bronze</b> |                                |

\*Leviton 500W, 120V AC 60Hz, 2500 SF coverage.

## Accessories (Order separately)

HOOD (Model 201 Requires Two)


- 400BK - Black
- 400W - White
- 400BZ - Bronze

SURFACE MOUNT WIRING BOX


|                     |                     |
|---------------------|---------------------|
| <u>Model 101</u>    | <u>Model 201</u>    |
| <b>1BK</b> - Black  | <b>2BK</b> - Black  |
| <b>1BW</b> - White  | <b>2BW</b> - White  |
| <b>1BZ</b> - Bronze | <b>2BZ</b> - Bronze |

REPLACEMENT LAMPHOLDER

- LPHBK - Black
- LPHW - White
- LPHBZ - Bronze

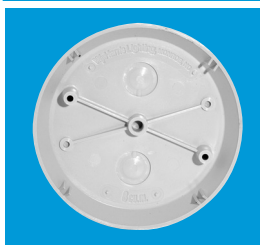


**1BW Surface Mount Wiring Box (White)**

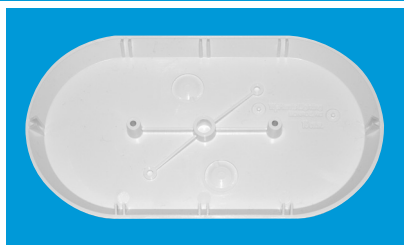

**2BW Surface Mount Wiring Box (White)**




**Model 201-BK Shown With Surface Mount Wiring Box**

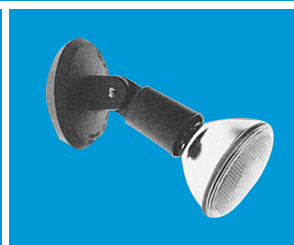


**Model 101-BK Shown With Surface Mount Wiring Box**

## Dimensions


**Model 201**

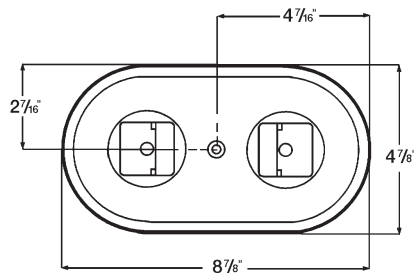


**Model 101**



**Surface Mount Wiring Box For Model 201**

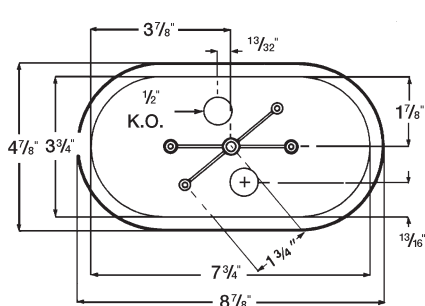

**Surface Mount Wiring Box For Model 101**



Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.

**Polycarbonate material carries a Limited Lifetime Warranty.**



# W.F. Harris Lighting, Inc.™

**Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA  
 704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)  
 customerservice@wfarris.com  
 www.wfarrislighting.com