

# LED LUMINAIRE RETROFIT

## Model LED-300RET-1K



Efficient, effective, and safe illumination. When housed in a watertight housing manufactured by W. F. Harris Lighting, the Model 300 Retrofit LED-300RET-1K can be used in wet location applications. Carries a ten-year warranty when the luminaire in which it is housed is mounted correctly so that water cannot penetrate the cavity. High quality LEDs and Driver further enhance reliability and durability while reducing power consumption.

Retrofitting an existing Model 300 luminaire is an easy installation. Simply remove the Lens and Base Plate. Replace the existing Base Plate with the rustproof Base Plate upon which is mounted the LED array. Then re-attach the Lens. Retrofitting an existing Model 300 luminaire will require obtaining a W. F. Harris Lighting Model 300 Housing, unless one is already attached.

Ideally suited in applications for building interiors and exteriors, walkways, ceilings and walls in grocery stores, hospitals, schools, universities, military installations and government installations, and other areas needing highly vandal resistant and reliable illumination.


**LEDs contain no mercury and emit no ultraviolet light.**

**LEDs will not break, unlike conventional lamps, if luminaire is dropped.**

### Specifications

**Base Plate:** Rustproof .080" 5052 H-32 tempered marine-grade aluminum.

**LEDs:** High Quality Lighting Grade LEDs  
**Net Lumens = 1100**  
Must be used with W. F. Harris Lighting Housing.  
Warranted for ten (10) years when luminaire in which they are housed is mounted correctly so that water cannot penetrate the cavity.

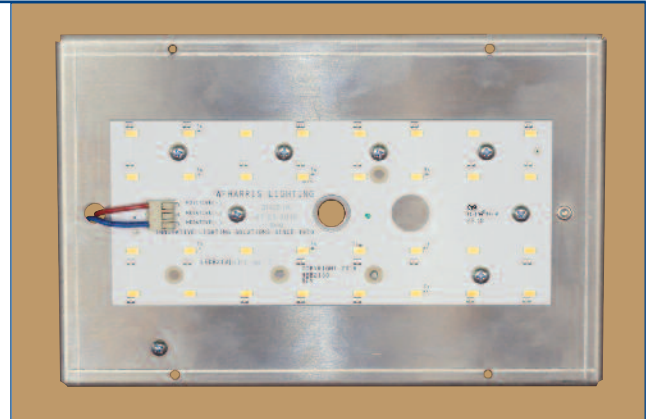

**LED Life:** Lumen Maintenance (TM-21-11 70% Projection)  
**127,000 Hrs (25°C/77°F) = 15 years of 24/7 LED life**  
**95,000 Hrs (50°C/122°F) = 11 years of 24/7 LED life**  
Calculations Based on US Department of Energy Worksheet. DOE TM-21-11, 70%.

**Driver:** High Quality Driver  
AC Input: 120V-277V, 50/60Hz  
**Power = 20 W at 350 mA**  
**Efficacy = 55 Lm/W**



Complies with FCC rules and regulations, as per Title 47 CFR Part 15 Non-Consumer (Class A) for EMI/RFI (conducted and radiated) at full load.

**Warranted for five (5) years by Driver manufacturer.**



**TAA COMPLIANT**  
TRADE AGREEMENT ACT COMPLIANT

**SBA QUALIFIED  
SMALL BUSINESS MANUFACTURER**

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94HB or better on lenses and the superior 94-5V rating on housings.

ETL-US and ETL-C Listed—Wet Location (UL1598 for Non-Emergency Luminaire.)  
LM-79 and LM-80 Test Data Available.

Luminaire Type \_\_\_\_\_  
Catalog Number \_\_\_\_\_  
Product Code \_\_\_\_\_  
Job Name \_\_\_\_\_  
Approval \_\_\_\_\_

**W.F. Harris Lighting, Inc.**

**Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA  
704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)

e-mail: customerservice@wfharris.com

www.wfharrislighting.com

Form 2587

1/19

*"A Live Operator Company Standing Ready to Serve Your Lighting Needs"*

# LED LUMINAIRE RETROFIT

## Ordering Information


Fill In Blocks for Complete Catalog Number

LED-300RET-1K

### Model

LED-300RET-1K - Retrofit 1K LEDs, Pan and Driver Assembly

## Dimensions

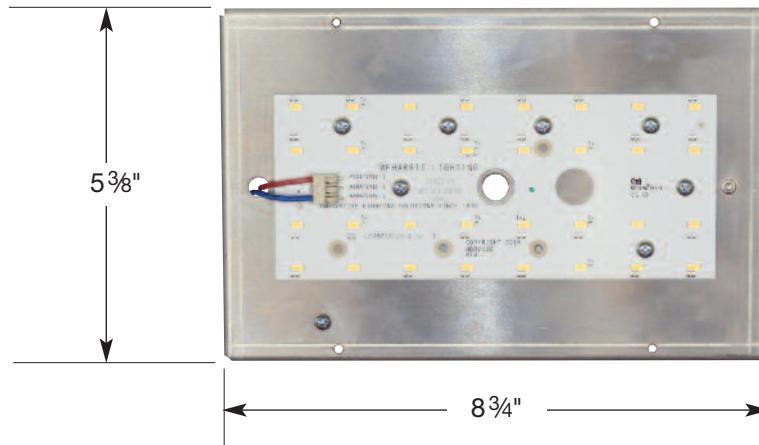

## LEDs and the W. F. Harris Lighting Advantage

The lighting grade LEDs used by W.F. Harris Lighting provide the long sought-after stability demanded for commercial illumination in brightness, efficacy, life time, and color temperatures. Can be used in commercial/industrial illumination applications, hospitals, schools, universities, government buildings, military installations and freezer applications.

W. F. Harris Lighting LED-based luminaires reduce ownership costs through four factors —

- (1) Maintenance avoidance – LEDs last much longer than traditional lamps plus the fixture is non-rusting and vandal resistant.
- (2) Reduced energy cost of the LEDs.
- (3) Reduced cost in operation of freezer compressors due to lower wattage and less heat.
- (4) LEDs will not break, unlike conventional lamps, if luminaire is dropped.
- (5) LEDs contain no mercury and emit no ultraviolet light.

These lighting grade LEDs offer efficient illumination that - depending on the application - can last up to 127,000 hours or 95,000 hours before their light output falls below 70% of original illumination and even longer in refrigerated environments.



**SBA QUALIFIED  
SMALL BUSINESS MANUFACTURER**

**TAA COMPLIANT**  
TRADE AGREEMENT ACT COMPLIANT

**W.F. Harris Lighting, Inc.**

**Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA  
704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)

e-mail: [customerservice@wfharris.com](mailto:customerservice@wfharris.com)

[www.wfharrislighting.com](http://www.wfharrislighting.com)

Specifications Subject to Change Without Notice.

Printed in USA

Form 2587

1/19

*"W. F. Harris Lighting Will Not Sacrifice Quality for the Sake of Price."*