

# 50 SERIES

Energy Efficient Lighting



**50M-D**



**50S-F**

Wall or Ceiling Mount

Energy Efficient  
Fluorescent Lamps

Polycarbonate Lens

Aluminum  
Base Plate

**WF**Harris Lighting

## FEATURES

- Opal white smooth polycarbonate lens.
- Aluminum base plate painted white.
- Compact fluorescent lamps.
- Pre-heat ballast in NPF or HPF 120V or HPF120-277V. All electronic ballast(s) are HPF 120V-277V.
- All ballasts are Class P rated.
- Three nylon lens retaining screws for positive relamping.
- Ideal for hallways, corridors, canopies, stairwells and breezeways in schools and universities, and commercial, industrial, government and civic facilities.
- ETL-US and ETL-C listed. Suitable for damp locations.

### Ordering Information (Fill In Blocks For Complete Catalog Number)

Example:

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Model	Lens	Watts / Lamp	Power Factor / Volts	Options

MODEL	LENS	WATTS / LAMP	POWER FACTOR / VOLTS	OPTIONS
50S	F (Flat Lens)	2-7 PL <sup>1</sup>	HPF 120	LP - Lamp
	D (Dome Lens)	2-9 PL <sup>1</sup> 2-13 PL <sup>2</sup> 22 FL <sup>2</sup> (Circline)	NPF 120	CW2-0°F Ballast for Two PL Lamps
50M	F	2-26 PLC <sup>3</sup>	NPF 120	LP - Lamp
	D	3-9 PL <sup>2</sup> 3-13 PL <sup>1</sup> OR 2 32 FL <sup>2</sup> (Circline)	HPF 120-277	CW2-0°F Ballast for Two PL Lamps CW3-0°F Ballast for Three PL Lamps

<sup>1</sup> Available in HPF 120V


<sup>2</sup> Available in NPF 120V


<sup>3</sup> Available in HPF 120-277V

## FLUORESCENT LAMP PERFORMANCE

	Twin Tube			Quad Tube	Circline	
	7 W	9 W	13 W	26 W	22 W	32 W
Input Watts	11 W	13 W	17 W	35 W	27 W	42 W
Lumen Output	400	600	900	1,800	1,050	1,925
Lamp Life (Hours)	10,000	10,000	10,000	10,000	12,000	12,000
Minimum Starting Temperature	0°F	25°F	32°F	32°F	50°F	50°F

## DIMENSIONS

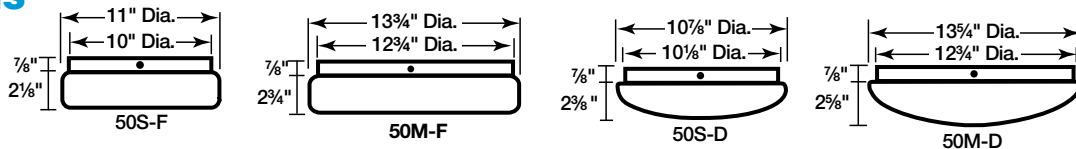

 Made in Monroe, North Carolina USA, a short drive from Charlotte.

**TAA COMPLIANT**  
TRADE AGREEMENT ACT COMPLIANT



# W.F. Harris Lighting

Innovative Lighting Designs Since 1970

4015 Airport Ext. Road, PO Box 5023, NC 28111 • (704) 283-7477 • Toll Free (800) 842-9345

www.wfharrislighting.com

email: customerservice@wfharris.com

FAX (704)283-6880

Printed in USA 4/14  
Form: BO5.R2015

(Specifications subject to change without notice.)

*"W. F. Harris Lighting Will Not Sacrifice Quality for the Sake of Price."*