

FLUORESCENT



30 Series *Rustproof Vandal-Resistant Wall/Ceiling Luminaire* 42 Watts Maximum

An energy-efficient compact luminaire that offers up to 42 watts of soft fluorescent lighting. **Rust resistant.** Engineered for indoor or outdoor use with materials offering the **highest resistance to corrosion and impact.** A variety of lens styles in decorator colors and a choice of horizontal or vertical mountings make this luminaire extremely versatile for office buildings, schools, hotels and motels, apartments, government installations, and commercial establishments. **PLT Lamp 0°F minimum starting temperature.**

Specifications

Lens:	Injection molded with prismatic interior of UV-stabilized polycarbonate in an average 1/8" thickness. Smooth exterior surface for ease of cleaning and rounded corners for added strength and safety. Selections include clear prismatic or opal white. Stylish single-end, double-end and horizontal painted lens in Black, White or Bronze. Suitable for graphic display of letters and numbers.
Base Plate:	Rust resistant .063" 5052 H-32 tempered marine-grade aluminum.
Housing: (optional)	Injection molded UV-stabilized reinforced polycarbonate in Black, White or Bronze. Includes five knockouts suitable for 1/2" conduit (gasket included). PLT and GX7 include 30B Housing.
Gasket:	Closed-cell neoprene rubber in 1/8" thickness creates a tight seal against contaminants.
Socket:	Two-pin and four-pin type with leads insulated for 105°C.
Lamp:	High efficiency PL, PLT or GX7 lamp(s) included. Up to ten times longer life and 70% energy savings over incandescent lamps. PLT and GX7 0°F minimum starting temperature.
Ballast:	Self-start preheat type in Normal Power Factor for 120V or High Power Factor for 120-277V, electronic ballast. PLT standard electronic 0°F starting temperature and 50/60 Hz.
Hardware:	Two stainless steel 8-32 phillips truss head screws or tamperproof screws attach lens to base plate. Mounting hardware included.



**SBA QUALIFIED
SMALL BUSINESS MANUFACTURER**

TAA COMPLIANT
TRADE AGREEMENT ACT COMPLIANT

ETL-US and ETL-C Listed – Wet Location

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94HB or better on lenses and the superior 94-5V rating on housings.

Luminaire Type _____
 Catalog Number _____
 Job Name _____
 Approval _____

Wf Harris Lighting, Inc.™

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA
 704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)

e-mail: customerservice@wfharris.com

www.wfharrislighting.com

Form 1510


5/19

"A Live Operator Company Standing Ready to Serve Your Lighting Needs"

FLUORESCENT

Ordering Information (Fill In Blanks For Complete Catalog Number)

Model	Lens Color	Painted Lens Color	Housing Color	Watts/Lamp	Power Factor	Volts	Options
30 ¹²	CP-Clear Prismatic	BK-Black	HK-Black	7 PL	NPF	120	TPS-Tamperproof Screws
30-S ^{6,10}	OW-Opal White	WH-White	HW-White	9 PL			30H <u> </u> -Housing (Specify Color)
30-D ^{6,8}	A-Environmentally Friendly ¹¹	BZ-Bronze	HB-Bronze	13 PL			K-Black W-White B-Bronze
30-NL ^{1,9}				2-9 PL ²			FS-Fuse and Holder
30-HZ-S ^{6,7}				1-13 GX7 ^{2,4}	HPF ²	120-277	PC-120-Photo Control for 120V Ballast ⁵
				2-13 GX7 ^{2,4}			PC-277-Photo Control for 277V Ballast ⁵
				18 PLT ^{*2,4}			GCO-Grounded Convenience Outlet ^{3,5}
				26 PLT ^{*2,4}			SW/B-On/Off Switch with Boot ^{3,5}
				32 PLT ^{*2,4}			
				42 PLT ^{*2,4}			



Accessories (Order Separately)
TPT-Tamperproof Screwdriver 

1Specify up to four numbers or letters.
 2Includes 30H housing.
 3Dry locations only.
 4HPF only.
 5Requires 30H housing.
 6Specify Painted Lens Color— BK (Black), WH (White), BZ (Bronze)
 7Available only in 9PL, 2-9PL, or 26PLT
 8Available only in 13PL
 9Available only in 9PL, 13PL or 18PLT
 10Not Available in 1-13GX7 or 2-13GX7

11Available only for Model 30-HZ-S with 13PL
 12Not Available in 7PL
 *Electronic


Light Distribution Patterns

Model 30-S-CP-2-9 PL
 Wall Mounted
 Based On 8' M.H.




Model 30-CP-13 PL
 Ceiling Mounted
 Based On 8' M.H.

Exploded View



Dimensions

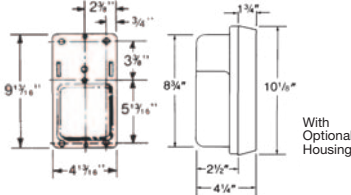

Fluorescent Lamp Performance

	7 Watt Twin	9 Watt Twin	13 Watt Twin	(2) 9 Watt Twin	13 Watt GX7	(2) 13 Watt GX7	18 Watt PLT	26 Watt PLT	32 Watt PLT	42 Watt PLT
Input Watts	11W	11W	17W	22W	13W	26W	18W	26W	32W	42W
Lumen Output	400	600	900	1,200	900	900	1,200	1,800	2,400	3,200
Lamp Life (Hours)	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000
Min. Starting Temp	0°F	25°F	32°F	25°F	0°F	0°F	0°F	0°F	0°F	0°F



**SBA QUALIFIED
 SMALL BUSINESS MANUFACTURER**

TAA COMPLIANT
 TRADE AGREEMENT ACT COMPLIANT

Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.

LENS AND HOUSING CARRY A LIFETIME WARRANTY.

Printed in USA

Form 1510

12/15

Conversion Tables

Lamp	Lamp Conversion Factor		Mounting Height	Height Conversion Factor
	Wall Mount	Ceiling Mount		
2-9 PL	1.00	1.33	6'	1.77
13 PL	.75	1.00	7'	1.30
9 PL	.50	.67	8'	1.00
7 PL	.33	.44	9'	.79
18 PLT	1.00	1.00	10'	.64
26 PLT	1.50	1.50		
32 PLT	2.00	2.00		
42 PLT	2.67	2.67		

Using Lamp Conversion Tables

TO ADJUST FOOTCANDLES (FC) SHOWN IN DIAGRAMS AT LEFT, USE ONE OF THE FOLLOWING FORMULAS WITH LAMP CONVERSION FACTOR (LCF) AND HEIGHT CONVERSION FACTOR (HCF):

$$FC \times LCF = FC \text{ with alternate lamp}$$

$$FC \times HCF = FC \text{ at alternate height}$$

$$FC \times LCF \times HCF = FC \text{ with alternate lamp at alternate height}$$

W.F. Harris Lighting, Inc.™

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA

704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)

e-mail: customerservice@wfharris.com

www.wfharrislighting.com

"W. F. Harris Lighting Will Not Sacrifice Quality for the Sake of Price."