


MODEL 80 INCANDESCENT/FLUORESCENT

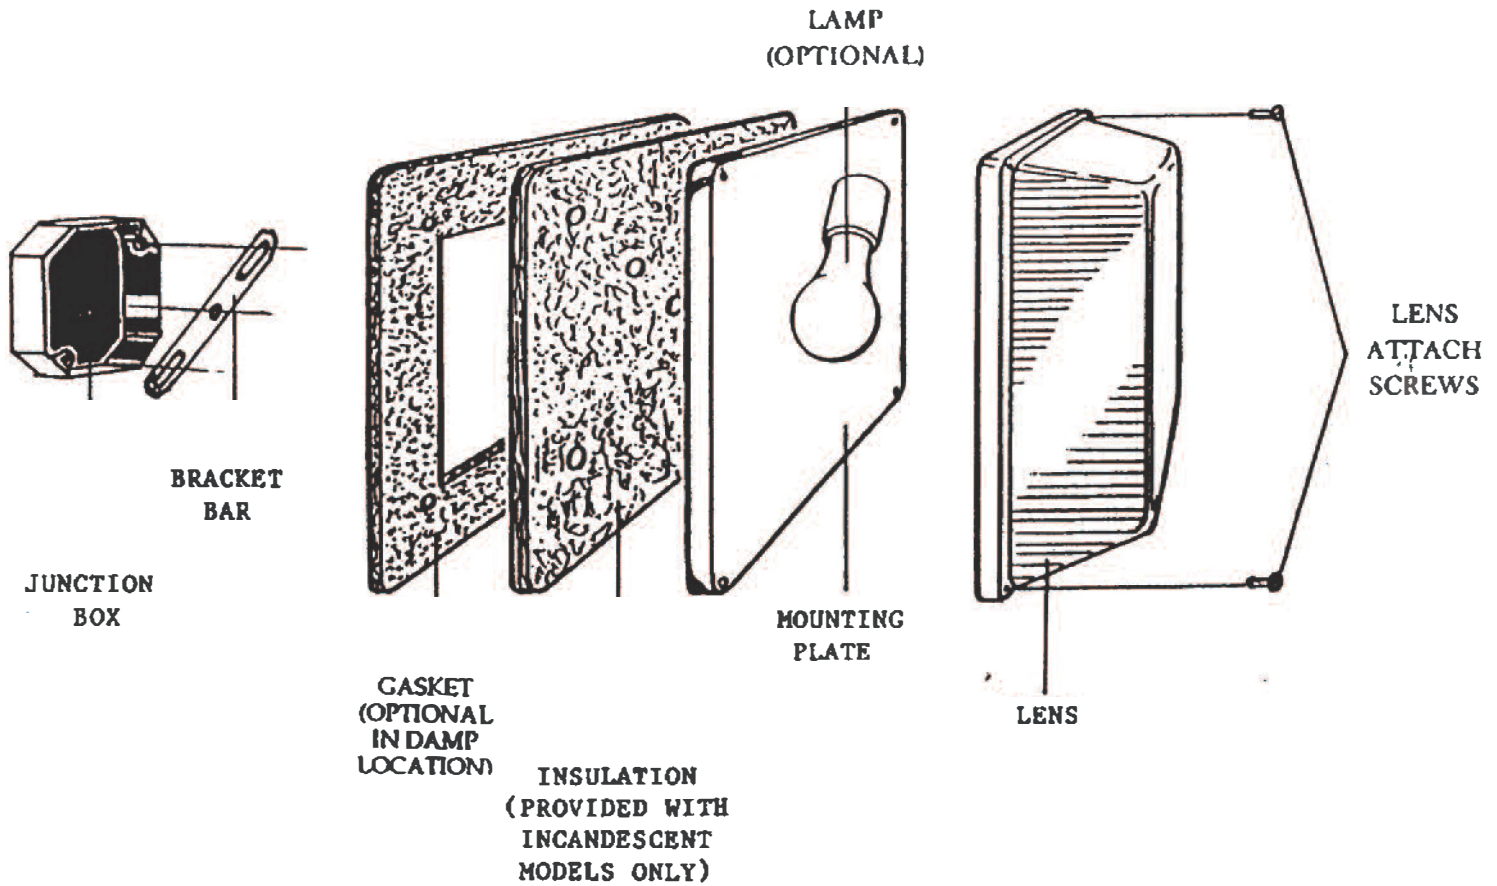

MODEL 80 INCANDESCENT SHOWN

WF Harris Lighting, Inc.

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023 (704) 283-7477

MODEL 80 MOUNTING INSTRUCTIONS (FOR INSTALLATION BY QUALIFIED ELECTRICIAN)

1. Turn off power at source.
 2. Remove lens from fixture.
 3. Install crossbar on existing junction box, or back out junction box corner-ear screws to facilitate use of keyhole slots in mounting plate for attaching fixture to junction box.
 4. If fiberglass insulation and gasket are being used, make sure that these two components are aligned properly with the mounting plate.
 5. Connect appropriate wires.
 6. Connect ground wire to ground hole in metal pan, or to ground lead, or to ground hole in crossbar, whichever of these methods will ground the fixture properly in your particular situation.
 7. Depending on your chosen method of attaching fixture to junction box, proceed as follows: insert threaded nipple through mounting hole in mounting plate and screw into crossbar; or locate screws (that you backed out in Step 3) through keyhole slot and tighten these screws in narrow section of keyholes.
- Note: The Model 80 Circline mounting plate is provided with two offset nipple holes for attachment by the nipple method to bracket bar.
8. To insure that a good water seal will be achieved under edge of lens, straighten gasket as you are tightening attachment hardware.
 9. If fixture is mounted on an irregular surface in a wet-location, a non-hardening caulk should be used to fill in spaces caused by the irregular surface.
 10. Install lamp(s).
 11. Install lens and tighten the four 8x32 screws which secure the lens to the mounting plate.

WARRANTY

W. F. Harris Lighting, Inc., warrants for a period of five (5) years from the date of shipment to the original purchaser that the product is free from defects in material and workmanship. W. F. Harris Lighting, Inc., disclaims any other representation or warranty on any of its products, expressed or implied, in fact or in law, without limitation, the warranty of merchantability or the warranty of fitness for a particular purpose. Every claim under this warranty shall be excluded unless made in writing and received by W. F. Harris Lighting, Inc., within 30 days of the date the defect to which the claim relates is discovered.

LIMITATION OF LIABILITY

The limit of the W. F. Harris Lighting, Inc., liability for failure of its products to meet the foregoing warranty shall be, at the sole option of W. F. Harris Lighting, Inc., either the repair or replacement of a defective product and shall exclude any damage caused by accident, misuse or abuse of the product.

Products may be returned, prepaid, to W. F. Harris Lighting, Inc., after prior written notification has been given and approval obtained for the return. No labor charges involved with replacements will be paid by W. F. Harris Lighting, Inc., without prior written approval from the factory.