

OUTDOOR ENTRY LIGHT



WALL LIGHT MODEL: E4078S



- Traditional Impact & weather resistant fixture with die cast aluminum housings and PC lens.
- Universal mounting plate with integral wire hooks for easy hands free installation.
- 0-10V dimming.
- Photocell included with optional photocell cover.
- Bronze housing finish as stock, special order colors available(white, silver,gray and black). Call for more information.
- Lumileds chip and name brand driver @ 5 year warranty.




Dimensions

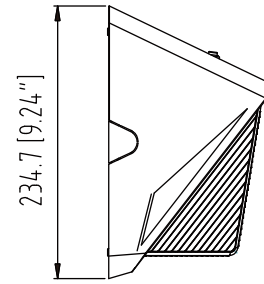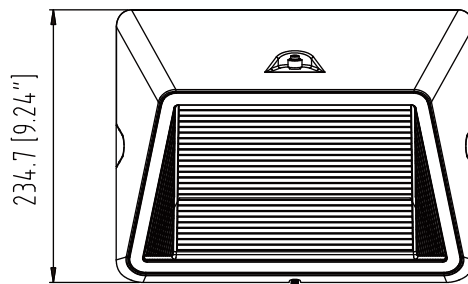

PHOTOMETRY

E4078S

MOUNTING HEIGHT=15.00 FT

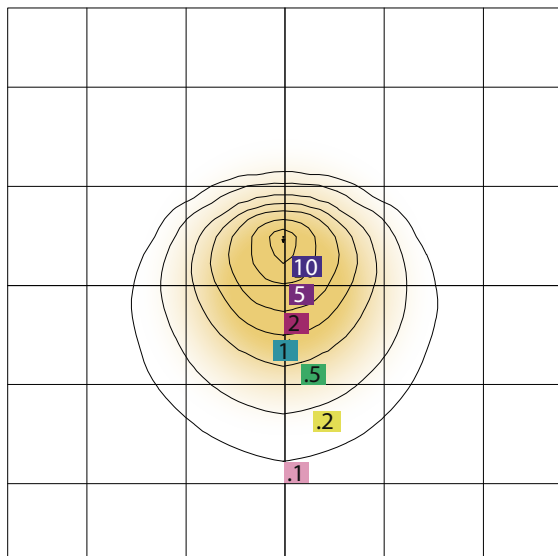

SCALE: 1 INCH = 27 FT. MAXIMUM CALCULATED VALUE = 12.44 FC
 LIGHT LOSS FACTOR = 1.00 FOOT CANDLE= .1 .2 .5 1 2 5 10

Specifications

- Lumens (LM): 10000LM
- Efficacy (LPW): UP TO 130LPW
- Input Voltage: 120-277V
- CRI: > 70
- Equivalency (W): 400W MH
- Operating Temp: -30 - 40°C
- Warranty: 5 Years

WF Harris Lighting, Inc.

Innovative Lighting Designs Since 1970

4015 Airport Ext. Road • Monroe, NC 28110 USA
 704.283.7477 (Headquarters) • 800.842.9345 (Toll Free)

E-Mail: customerservice@wfharris.com

www.wfharrislighting.com